


## Multi-Deck F16-08 (Tokyo)

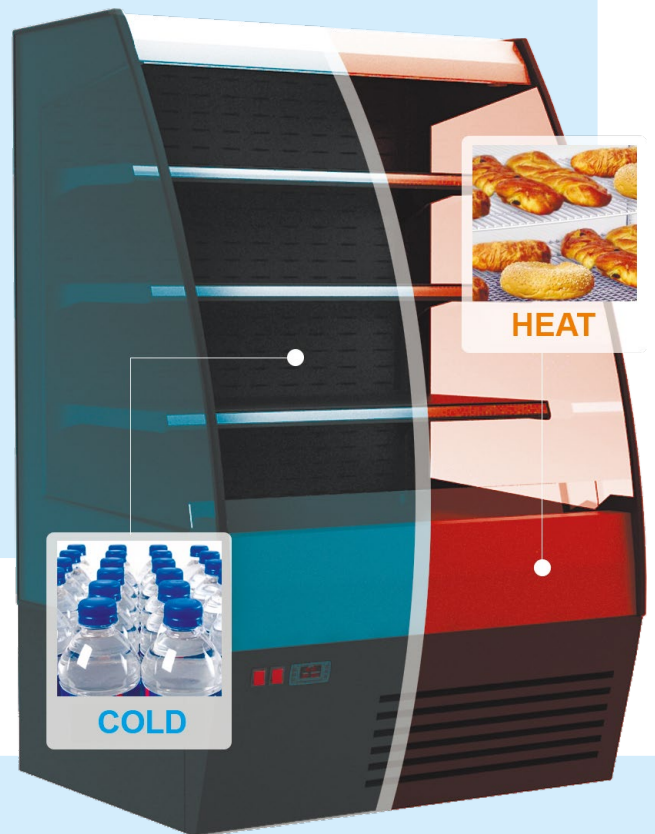

- ▼ The perfect solution for any store format.
- ▼ Due to its small size with an increased display of the goods, it can be used for promotional sales.
- ▼ The showcase is presented both versions as in the refrigerator and in the thermal solution, it is possible to universal the performance of heat/cold


**Carboma®**

## TECHNICAL PARAMETERS


Model	Length with the sidewalls, mm	Length without the sidewalls, mm	Horizontal area of the exposition, m <sup>2</sup>	Net volume, m <sup>3</sup>	Operating temperature, °C
	→ <b>MM</b>	→ <b>MM</b>	<b>M<sup>2</sup></b>	<b>M<sup>3</sup></b>	
1,0	1042	1000	1,89	0,38	+2...+7
1,3	1342	1300	2,47	0,49	
1,9	1942	1900	3,59	0,72	
1,0	1042	1000	1,89	0,6	up to +45
1,3	1342	1300	2,47	0,78	
1,9	1942	1900	3,59	1,14	
1,0 heat/cold*	1042	1000	1,89	0,38 / 0,6	+2...+7/up to +45
1,3 heat/cold*	1342	1300	2,47	0,49 / 0,78	
1,9 heat/cold*	1942	1900	3,59	0,72 / 1,14	

\* showcase heat/cold works either in refrigeration or in thermal mode


### COOLING

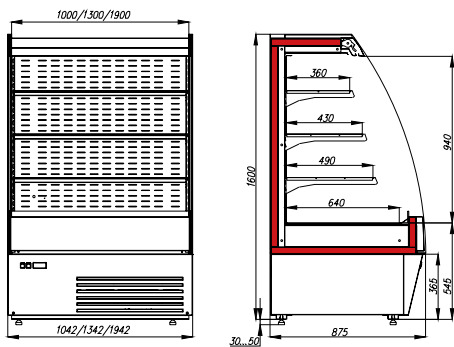

### THERMAL

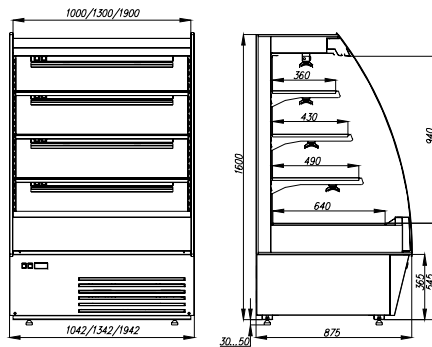

### HEAT-COLD

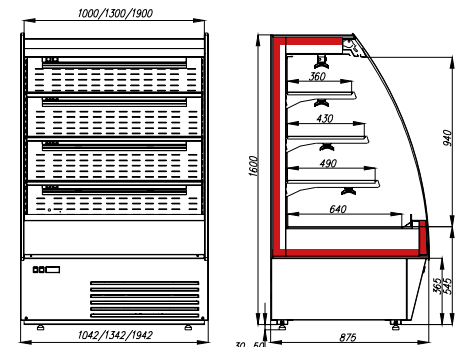

Climate class of equipment: 3  
Showcases are designed for indoor use with natural ventilation at temperature ambient air from +12°C to +25°C, relative humidity not more than 60%

### COLOR SOLUTIONS



### OPTIONS:

- additional shelf with brackets
- protective bumper (stainless steel pipe)
- lighting of each shelf (LED)
- limiters on the shelf
- price tags h-39 mm
- any color scheme (RAL)
- INOX version

- 1 Energy-saving curtain in the base pickings
- 2 Shelf with tilt angle change
- 3 Decorative element from stainless steel
- 4 Tinted glass

